

# 603 Cabinets



## Standard

- Comply with ANSI/EIA RS-310-D, IEC60297-2, DIN41494; PART1; DIN41494; PART7.

## Material

- SPCC Cold Rolled Steel;
- 19" rails: 2.0mm, frame: 1.5mm, others: 1.2mm.

## Colour

- 603 ■■■■■■ 0 ■■:RAL7035.
- 603 ■■■■■■ 1 ■■:RAL9004.

## Loading Capacity


- Static loading:1000KG.

# CABINET 603 SERVER CABINETS



## Feature

- Reticular high-density vented front door (patent) & rear door for protection, ventilation and reliable operation.
- Exquisite image (patent) with precise dimension and craftsmanship.
- Lockable cable entry on top cover and bottom panel with adjustable sizes.
- Optional plinth enables cabinets to stay in a fixed position while meeting requirements of under-base wiring/ventilation and rat prevention.
- Strong cabinet connection by baying kit (patent).
- Lock with handle.

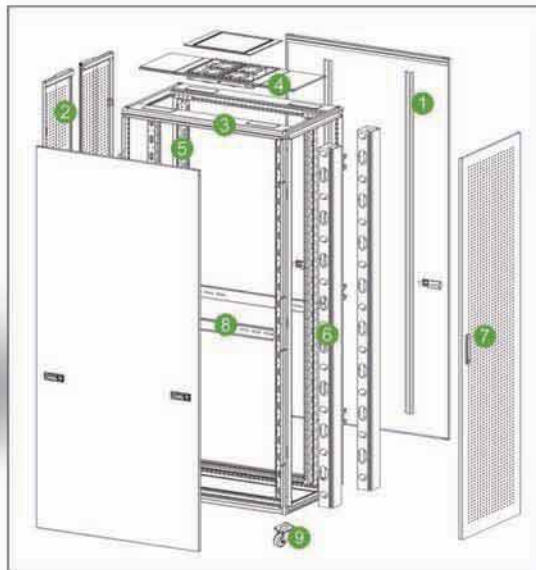

## Main Part

| S/N | Specification         | Qty | Material  | Surface Finish | Remark                            |
|-----|-----------------------|-----|-----------|----------------|-----------------------------------|
| 1   | Side panel            | 2   | SPCC t1.2 | Powder coated  |                                   |
| 2   | Rear door             | 1   | SPCC t1.2 | Powder coated  | Double high-density vented        |
| 3   | Frame                 | 1   | SPCC t1.5 | Powder coated  |                                   |
| 4   | Top cover             | 1   | SPCC t1.2 | Powder coated  | ----                              |
| 5   | 19" rails             | 4   | SPCC t2.0 | Powder coated  |                                   |
| 6   | Cable management slot | 2   | SPCC t1.0 | Powder coated  | Only used for width 800mm cabinet |
| 7   | Front door            | 1   | SPCC t1.2 | Powder coated  | High-density vented               |
| 8   | Mounting plate        | 2   | SPCC t1.5 | Powder coated  | ----                              |
| 9   | 2" heavy duty castor  | 4   | ----      | ----           | ----                              |
| A   | M12 adjustable feet   | 4   | ----      | v              | ----                              |
| B   | M6 screw& nuts        | 20  | Steel     | Color zinc     | 40pcs for over 33U                |
| C   | Trox tooling          | 1   | Steel     | Color zinc     | ----                              |

The 600mm width cabinet can be changed to the 800mm width one, only need to put the connecting panel and 2 cable management slots Support 19" EIA equipment.

# CABINET

## 603 SERVER CABINETS

### Specification


| Model No.       | Capacity (U) | Width (mm) | Depth(D)(mm) | Height(H)(mm) | Packing dimension W*D*H |
|-----------------|--------------|------------|--------------|---------------|-------------------------|
| 603.6633.55.000 | 33           | 600        | 600          | 1600          | 670*670*1700            |
| 603.6638.55.000 | 38           |            |              | 1800          | 670*670*1900            |
| 603.6642.55.000 | 42           |            |              | 2000          | 670*670*2100            |
| 603.6647.55.000 | 47           |            |              | 2200          | 670*670*2300            |
| 603.6833.55.000 | 33           |            | 800          | 1600          | 670*870*1700            |
| 603.6838.55.000 | 38           |            |              | 1800          | 670*870*1900            |
| 603.6842.55.000 | 42           |            |              | 2000          | 670*870*2100            |
| 603.6847.55.000 | 47           |            |              | 2200          | 670*870*2300            |
| 603.6933.55.000 | 33           |            | 900          | 1600          | 670*970*1700            |
| 603.6938.55.000 | 38           |            |              | 1800          | 670*970*1900            |
| 603.6942.55.000 | 42           |            |              | 2000          | 670*970*2100            |
| 603.6947.55.000 | 47           |            |              | 2200          | 670*970*2300            |
| 603.6042.55.000 | 42           | 1000       | 2000         | 670*1070*2100 |                         |
| 603.6047.55.000 | 47           |            | 2200         | 670*1070*2300 |                         |
| 603.8642.55.000 | 42           |            | 800          | 600           | 870*670*2100            |
| 603.8842.55.000 | 42           |            |              | 800           | 870*870*2100            |
| 603.8942.55.000 | 42           | 900        |              | 870*970*2100  |                         |
| 603.8042.55.000 | 42           | 1000       |              | 870*1070*2100 |                         |

Note: Cabinet should not in flat packing.

### May Installs The Fitting



Cable management

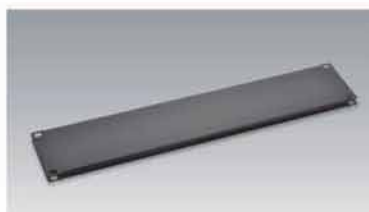

Blanking panel



Fan units



TC Digital Temperature Unit



PDU